



Gewindedrehplatten

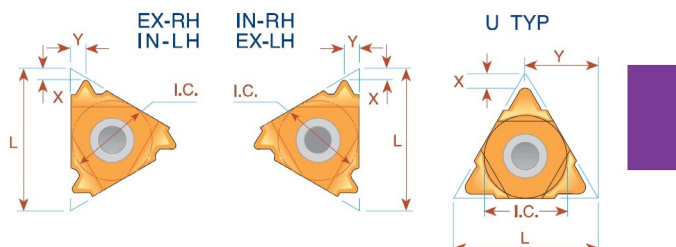

Teilprofil 55°




L	I.C. Zoll	Steigung mm Gänge/Zoll	AUßEN Bestellcode		INNEN Bestellcode		X	Y
			Rechts	Links	Rechts	Links		
6	5/32	0.5 -1.25 48-20	<i>Ultra Mini</i>		*06 IR A55	*06 IL A55	0.5	0.6
8	3/16	0.5 -1.5 48-16	<i>Mini</i>		*08 IR A55	*08 IL A55	0.6	0.7
8U	3/16U	1.75-2.0 14-11	<i>"U" Mini</i>		*08U IR/L U55		0.9	4.0
11	1/4	0.5 -1.5 48-16	11 ER A55	11 EL A55	11 IR A55	11 IL A55	0.8	0.9
16	3/8	0.5 -1.5 48-16	16 ER A55	16 EL A55	16 IR A55	16 IL A55	0.8	0.9
16	3/8	1.75-3.0 14- 8	16 ER G55	16 EL G55	16 IR G55	16 IL G55	1.2	1.7
16	3/8	0.5 -3.0 48- 8	16 ER AG55	16 EL AG55	16 IR AG55	16 IL AG55	1.2	1.7
22	1/2	3.5 -5.0 7- 5	22 ER N55	22 EL N55	22 IR N55	22 IL N55	1.7	2.5
22U	1/2U	5.5 -8.0 4.5- 3.25	22U E/R/L U55				0.9	11.0
27	5/8	5.5 -6.0 4.5- 4	27 ER Q55	27 EL Q55	27 IR Q55	27 IL Q55	2.0	2.9
27U	5/8U	6.5 -9.0 4 - 2.75	27U E/R/L U55				1.2	13.7

Bestellbeispiel: 16 ER G55 MXC

Für kleine Bohrungen siehe auch Seite 82

* Ausschließlich in BXC und BMA Beschichtung verfügbar



Typ B

Profilgeschliffen mit gesintertem Spanbrecher




L	I.C. Zoll	Steigung		AUßEN		INNEN		X	Y
		mm	Gänge/Zoll	Bestellcode		Bestellcode	Rechts		
16	3/8	1.75-3.0	14-8	16 ER B G55		16 IR B G55		1.2	1.7
16	3/8	0.5-3.0	48-8	16 ER B AG55		16 IR B AG55		1.2	1.7

Bestellbeispiel: 16 ER B G55 BMA



Gewindedrehplatten

Teilprofil 55° V-Typ

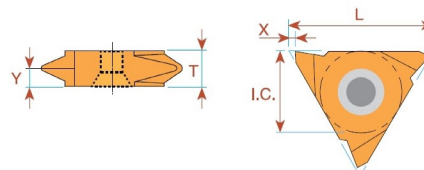

L	I.C. Zoll	Steigung mm Gänge/Zoll		AUßEN Bestellcode		INNEN Bestellcode		X	Y	T
				Rechts	Links	Rechts	Links			
16	3/8	0.5 - 1.5	48-16	16V ER A55	16V EL A55			1.0	0.9	3.6
16	3/8	1.75- 3.0	14- 8	16V ER G55	16V EL G55			1.0	1.7	3.6
16	3/8	0.5 - 3.0	48- 8	16V ER AG55	16V EL AG55			1.0	1.8	3.6
22	1/2	3.5 - 5.0	7- 5	22V ER N55	22V EL N55			1.2	2.5	4.8
27	5/8	6.0 -10.0	4- 2.5	27V ER V55	27V EL V55	27V IR V55	27V IL V55	1.8	5.2	10.4

Bestellbeispiel: 22V ER N55 BMA